

# AIREX<sup>®</sup> PET foams

For Building & Construction


High-performance rigid  
**AIREX<sup>®</sup> PET foams**  
bring new solutions into  
Building & Construction  
applications

Find out how  
**AIREX<sup>®</sup> PET foams**  
can make you  
more competitive!

**B**uilding & Construction is a wide market of diverse disciplines ranging from design/aesthetics to high structural load-bearing or maximum insulation – to name just a few. Composites and particularly sandwiches using low-weight rigid and insulating polymer foams enable innovative technical solutions offering multiple benefits:

- High-performance 3D roofs and facades.
- Multi-functional: combine insulation & load bearing.
- Mass/weight reduction: lower support structure & installation cost.
- No limits on design and creativity.

## Load-bearing AND insulation in one material



**B**uilding materials are typically fabricated for structural load-bearing OR optimized for thermal insulation. **AIREX® PET foams** combine these two properties and therefore offer new solutions. Tightened legislation with regard to building insulation, modern architectural trends and demand for higher performance call for such innovative solutions in Building & Construction. Rigid foams and sandwich composites offer winning answers to these challenges:

- **Freeform shapes and wide support spans**  
With **AIREX® PET** sandwich composites, highly insulating roofs or facades can be freely designed in any 3D shape with fewer supports thanks to their low weight.
- **Structural insulation**  
Interfaces – e.g. masonry and windows/doors – can be designed for maximum insulation, avoiding any thermal bridges while transmitting the occurring loads.
- **Minimizing loads and installation efforts**  
All weight-relevant elements (facades, balconies, bridges) can be made much lighter to reduce the weight & cost of the substructure as well as minimize time & effort during installation. Renovations may require less structural strengthening for older buildings.

## Sandwich design brings lightweight

**T**he combination of stiff face sheets and a rigid foam core enables very light and strong load-bearing structures.


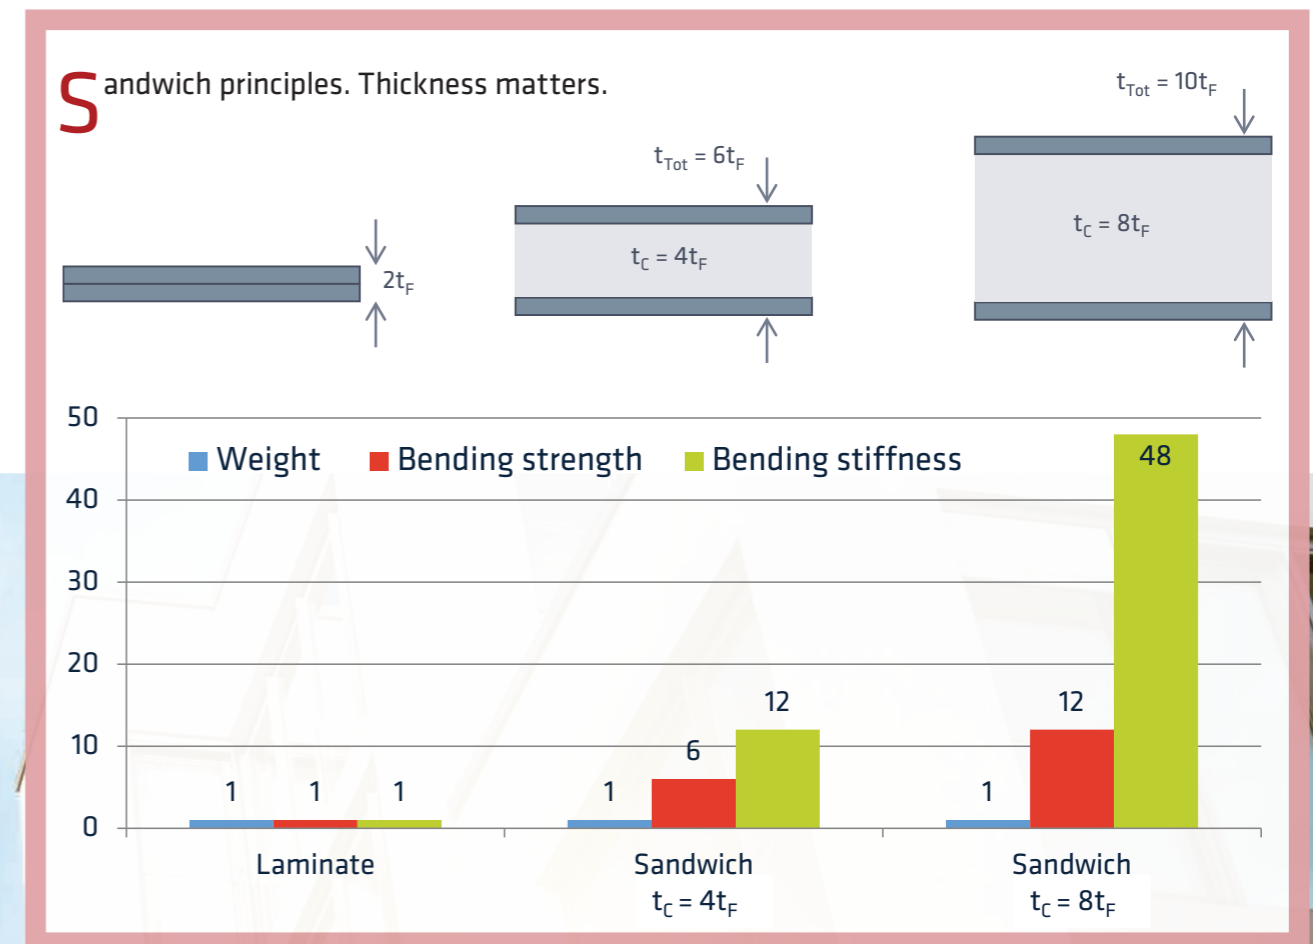


Fig. 1. Composite sandwich structures allow lightweight, strong and stiff structures that can be freely shaped in any 3D form and offer excellent insulation.


# Strong AND insulating – a novel combination

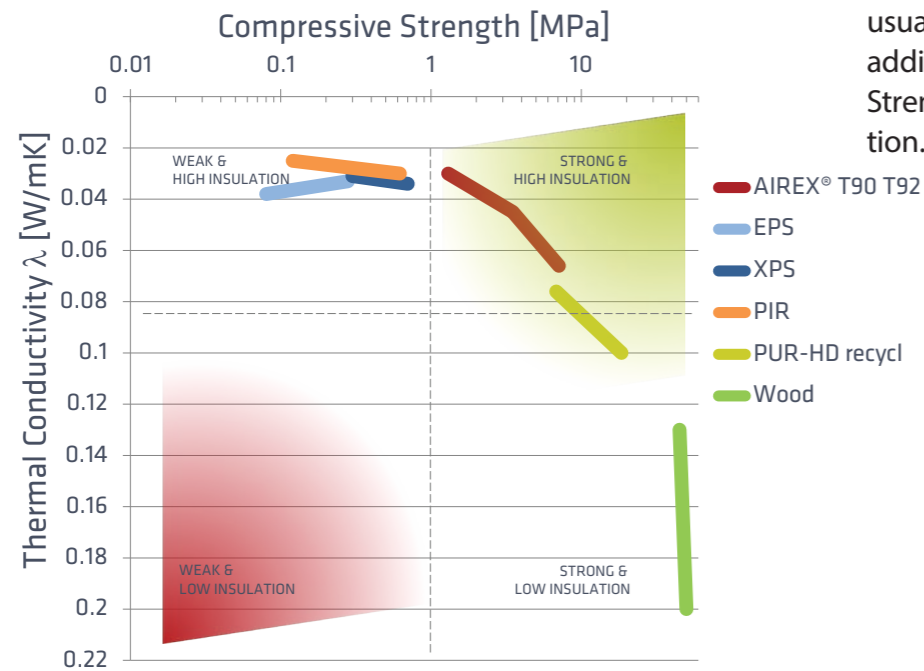

**AIREX®** rigid foams combine properties that usually require two separate, additive material solutions: Strength and thermal insulation.

Fig. 2. **AIREX® PET foams** uniquely combine high mechanical properties with excellent thermal insulation – a new class of materials.

# Screws with tight grip

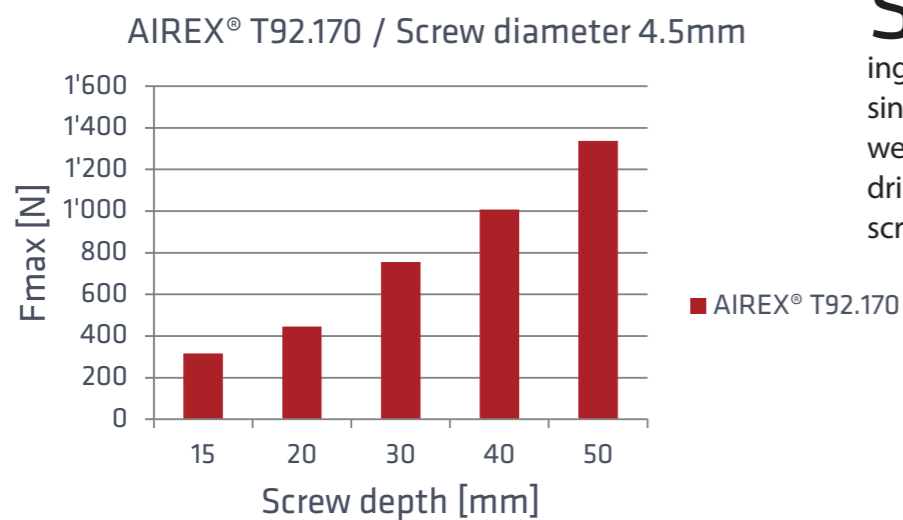

Screws hold firm in **AIREX®** rigid PET foams. Depending on the foam density a single screw can withstand well beyond 1'000 N. No drilling is required to fit the screws into the material.

Fig. 3. Screw pull-out forces: depending on screw-in depth, screw type, and foam density, forces exceeding 1'000 N can be achieved.

# Properties of AIREX® T90 & T92

## General foam properties

- Closed-cell, rigid polymer foam based on PET.
- Extremely wide density range (60 kg/m<sup>3</sup> up to 320 kg/m<sup>3</sup>).
- Long-term stable, no degradation over time.
- Produced with recycled content & recyclable.

## High chemical and physical stability

- High chemical resistance (solvent and alkaline resistant).
- Compatible with a great majority of adhesives and resins.
- Water resistant, no water/humidity absorption, does not rot.
- High temperature resistance, over 100 °C.
- Non-toxic.

## Outstanding mechanical properties

- High load-bearing capacity (up to 7 MPa compression).
- Good screw retention, also with standard wood screws.
- High creep resistance.

## Good fire resistance


- B1 according DIN 4102-1.
- C s2 d0 according EN 13501-1.

## Excellent thermal insulation

- Reaches excellent insulation values; up to 0.030 W/mK (thermal conductivity) R-value up to 1.67 m<sup>2</sup>K/W for 50 mm (2") thickness.
- Insulation quality can be adjusted by choosing the foam density.

## Easy processing

- Can be machined with conventional wood-processing machines.
- Screws directly screwed into material (no drilling required).
- Very simple to glue.
- Thermoformable.

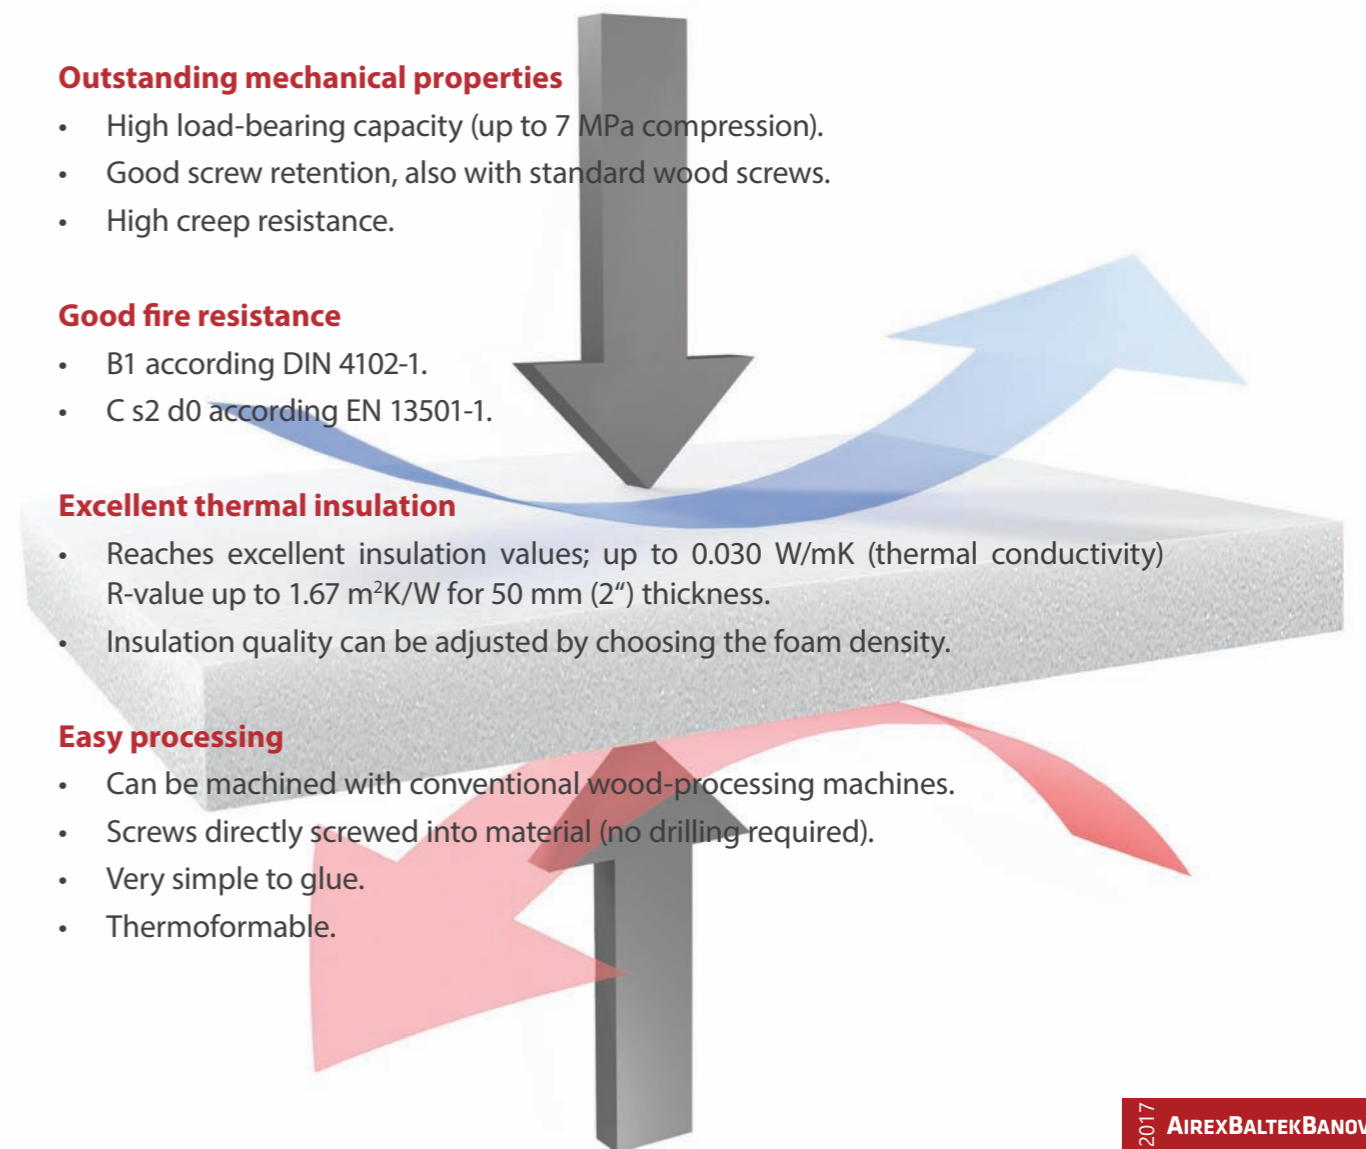


## Roofs

Wide, unsupported span; 3D freeform, fire resistant, long-term stability.



## Sandwich panel

Lightweight, humidity resistant, screw retention, fire resistance.

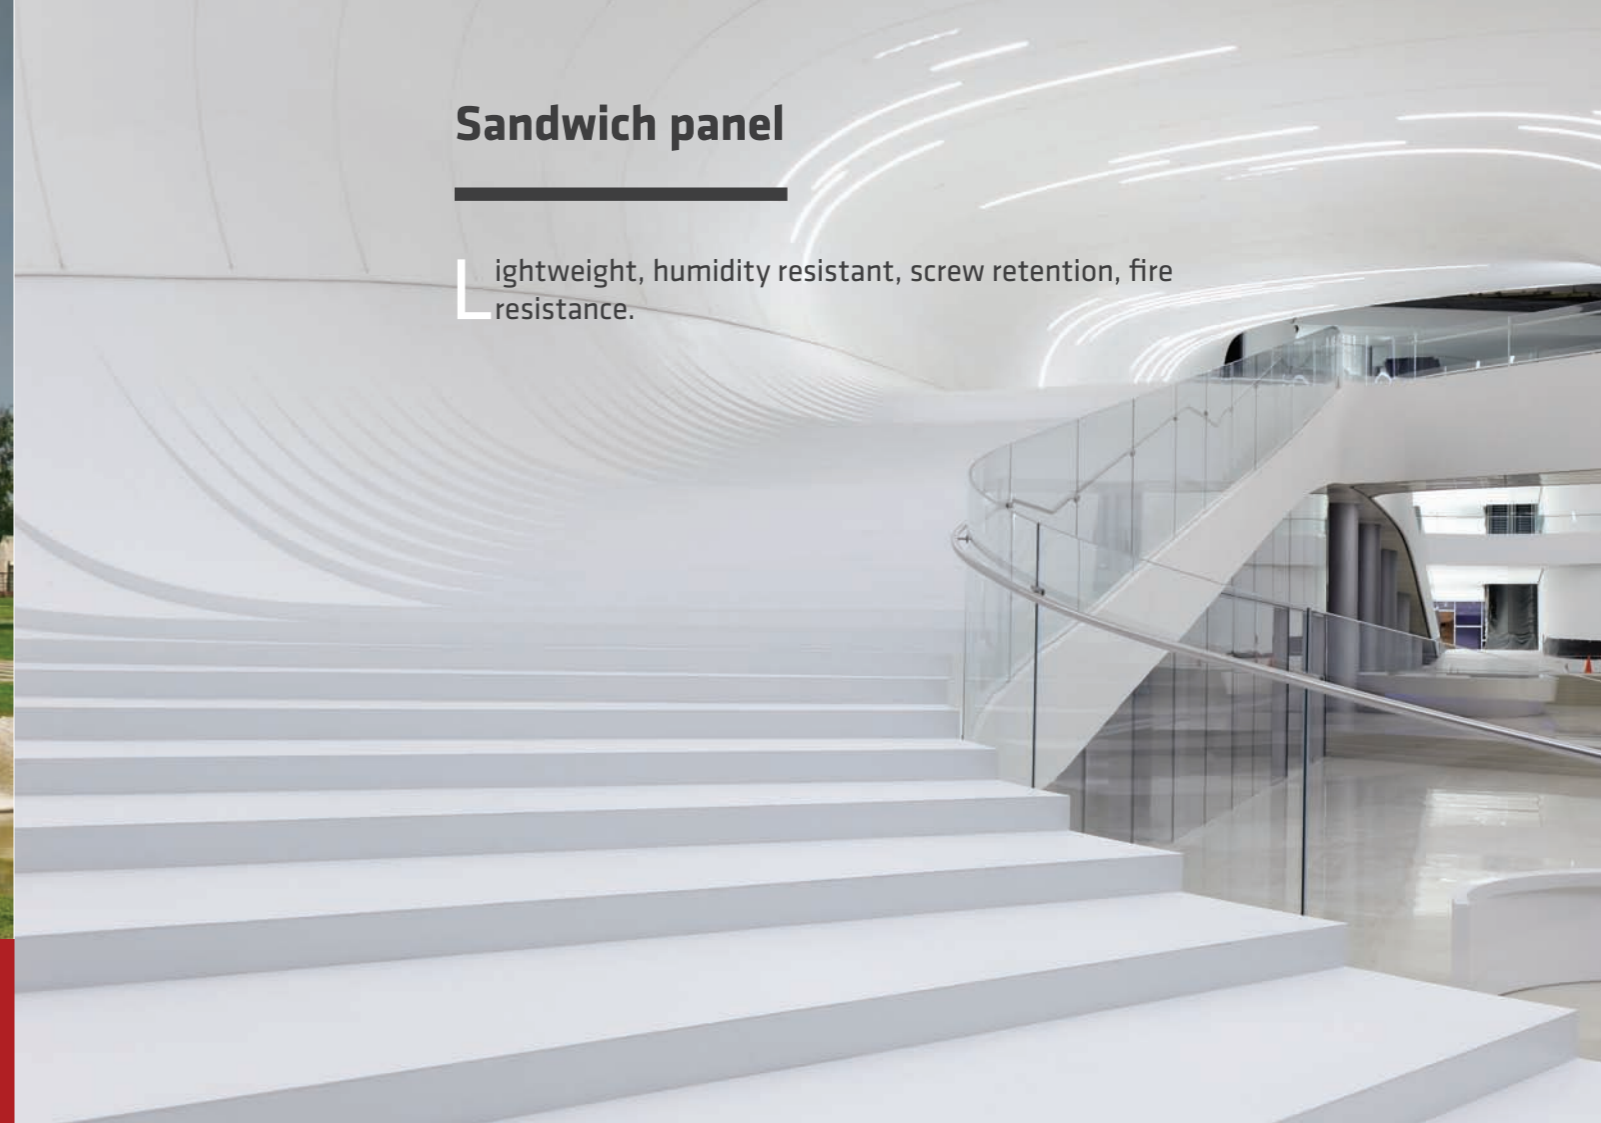

## High performance AIREX® PET foams

Bring new solutions for Building & Construction

## Facades

Lightweight, insulating 3D shaped structures.



## Structural insulation

Load-bearing capacity, screw retention, thermal insulation, chemical and thermal resistance.



# AIREX<sup>®</sup> PET foams

For Building & Construction

## ABOUT

## 3A Composites Core Materials

3A Composites Core Materials is a global organizational unit within 3A Composites, part of Schweiter Technologies (SIX Swiss Exchange: SWTQ), with operations in Europe, the Americas, India, China and Papua New Guinea, that has pioneered the sandwich technology for more than 75 years. Its AIREXBALTEKBANOVA brand offers the broadest portfolio in the industry and provides sustainable, lightweight and resource-friendly, high-quality core materials to enable the production of lighter and thus more energy-efficient end products for multiple applications such as wind turbine blades, nacelle covers, hull of a boat, automotive parts, building & construction applications, etc.



[www.airexbaltekbanova.com](http://www.airexbaltekbanova.com)

### Europe | Middle East | India | Africa

Airex AG  
5643 Sins, Switzerland  
T +41 41 789 66 00 | F +41 41 789 66 60  
[corematerials@3AComposites.com](mailto:corematerials@3AComposites.com)

### North America | South America

Baltek Inc.  
High Point, NC 27261, USA  
T +1 336 398 1900 | F +1 336 398 1901  
[corematerials.americas@3AComposites.com](mailto:corematerials.americas@3AComposites.com)

### Asia | Australia | New Zealand

3A Composites (China) Ltd.  
201201 Shanghai, China  
T +86 21 585 86 006 | F +86 21 338 27 298  
[corematerials.asia@3AComposites.com](mailto:corematerials.asia@3AComposites.com)