

## CUROX<sup>®</sup>M-303

Methyl ethyl ketone peroxide  
CAS#1338-23-4  
Liquid mixture

### Description

Colourless, mobile liquid, consisting of peroxides based on methylethylketone, essentially desensitised with phthalate plasticiser. This ketone peroxide is used as an initiator (radical source) in the curing of unsaturated polyester resins. Main application: gelcoats, curing of moulded, casted or winded glasfibre reinforced products at ambient temperature in combination with cobalt accelerators.

### Technical Data

Appearance	Colourless liquid
Active oxygen	Approx 9.1 % w/w
Free hydrogenperoxide content	Approx. 1.7 % w/w
Water content	Approx. 1.5 % w/w
De-sensitising agent	Dimethylphthalate
Density at 20 °C	Approx. 1.1 g/cm <sup>3</sup>
Viscosity at 20 °C	Approx. 20 mPa.s
Miscibility	Miscible with alcohols, phthalates
Critical temperature (SADT)	Above 60 °C
Cold storage stability	Below -20 °C
Recommended storage temperature	0 to 30 °C
Maintenance of activity at 30 °C as from date of delivery	6 months

### Application

**POLYESTER CURING:** Curing agent for all UP resin types at ambient temperature in combination with cobalt accelerators. Standard dosage level: 1-3% as supplied, with 0.5-2% of a 1% cobalt solution.

Suitable also for gelcoats with improved osmosis resistance and lowest porosity due to low water- and hydrogenperoxide content.

"Pot life" (gel time of resin + peroxide + accelerator) relatively short, but may be prolonged by adding Inhibitors, such as tert.butyl catechol.


**CURING PERFORMANCE:** Moderate evolution of heat. Relatively long mould release time, moderate mould release factors. Temperatures below 20 °C prolong curing times considerably, alternatively cobalt / amine accelerators should then be used.

**PROCESSING METHODS:** Particularly hand lay-up, spray lay-up, centrifugal casting, filament winding, casting of resins, and surface coatings (putties, fillers, gelcoats and topcoats).


**SPRAY EQUIPMENT:** Use spray equipment in accordance with manufacturer's instructions. Ensure all safety devices are operational. Do not clear gun by spraying MEKP into the air.

Further information on suitable curing agents for unsaturated polyester resins is given in our application brochures on this subject

**Activity:**

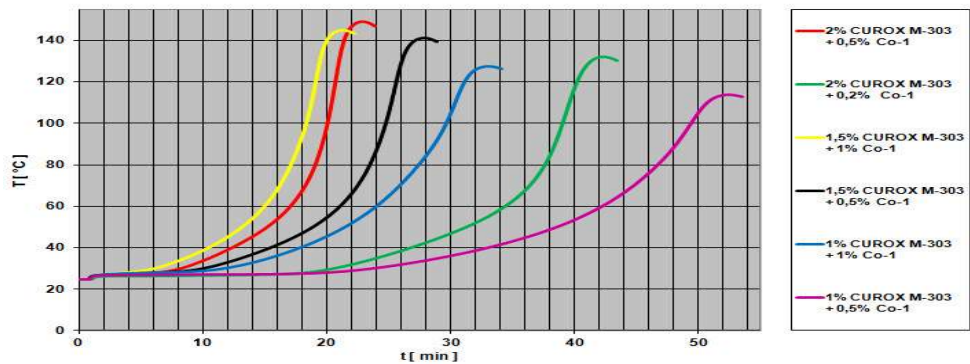

Measurements in compliance with DIN 16945 at 25°C with OPA resin (20g in a test tube)						
Medium reactive resin type (OPA)		100	100	100	100	100
CUROX® M-303	[Vol-%]	2.0	2.0	1.5	1.5	1.0
BÜFA® Accelerator Co 1	[Vol-%]	0.5	0.2	1.0	0.5	1.0
<b>Curing data</b>						
Gel time 25 -30°C $t_{gel}$	[min]	8.0	20.5	6.0	10.0	11.5
Gel time 25 -35°C $t_{gel}$	[min]	10.5	24.0	8.5	13.0	15.5
Curing time $t_{max}$	[min]	23.0	42.5	21.0	28.0	33.0
Peaktemperature $T_{max}$	[°C]	149	132	145	141	127

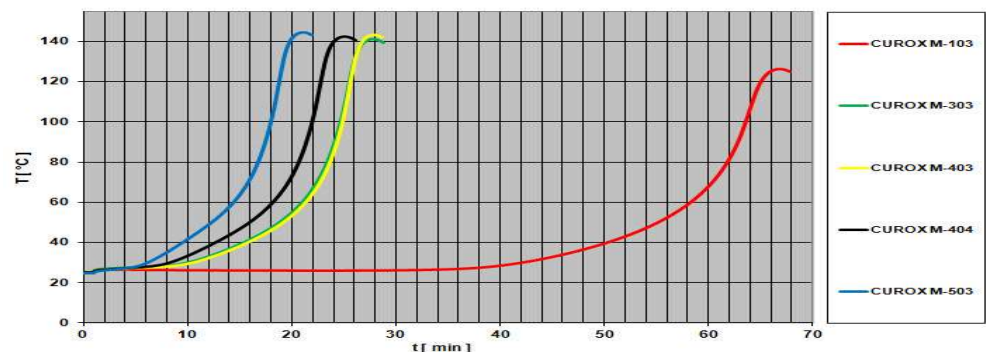

# Technical Data Sheet

Measurements in compliance with DIN 16945 at 25 °C with OPA resin (20g in a test tube)						
Medium reactive resin type (OPA)		100	100	100	100	100
CUROX® M-103	[Vol-%]	1.5				
CUROX® M-303	[Vol-%]		1.5			
CUROX® M-403	[Vol-%]			1.5		
CUROX® M-404	[Vol-%]				1.5	
CUROX® M-503	[Vol-%]					1.5
BUFA® Accelerator Co 1	[Vol-%]	0.5	0.5	0.5	0.5	0.5
Curing data						
Gel time 25 - 30 °C $t_{gel}$	[min]	42.0	10.0	10.5	8.5	6.0
Gel time 25 - 35 °C $t_{gel}$	[min]	47.0	13.0	13.5	11.0	8.0
Curing time $t_{max}$	[min]	66.5	28.0	28.0	25.0	21.0
Peakttemperature $T_{max}$	[°C]	127	141	143	143	145

## Standard Packaging

The standard package size of Curox®M-303 are 5 kg and 25 kg polyethylene bottles.

## Disclaimer

This information and all further technical advice are reflecting our present knowledge and experience based on internal tests with local raw materials with the purpose to inform about our products and applications. The information should not be construed as guaranteeing specific properties of products described or their suitability for a particular application, nor as providing complete instructions for use. The information implies no guarantee for product and shelf life properties, nor any liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. We reserve the right to make any changes according to technological progress or further developments.

Application and usage of our products based on our technical advice is out of our control and sole responsibility of the user. The user is not released from the obligation to conduct careful inspection and testing of incoming goods in order to verify the suitability for the intended application.

United Initiators  
**EU**  
T: +49 89 74422 237  
F: +49 89 74422 6237  
cs-initiators.eu@united-in.com

United Initiators  
**Nafta**  
T: +1 800 231 2702  
F: +1 440 323 0898  
cs-initiators.nafta@united-in.com

United Initiators  
**China**  
T: +86 20 6131 1370  
F: +86 139 2503 8952  
cs-initiators.cn@united-in.com

United Initiators  
**Australia**  
T: +61 2 9316 0046  
F: +61 2 9316 0034  
cs-initiators.au@united-in.com

[www.united-initiators.com](http://www.united-initiators.com)

Revision number: 1.0. Date: 01.07.2014. Device M: TDS.